




ESRF Upgrade Phase II

J. L. Revol

On behalf of the **Accelerator & Source Division**


14 May 2013







The European Synchrotron Radiation Facility A Light for Science

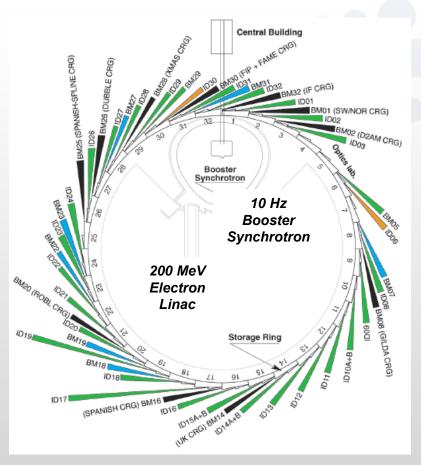

844 m circumference storage ring DBA lattice, 32 straight sections

42 Beamlines (including 12 on Bending Magnet BL)

Third generation light source

Location: Grenoble, France

Cooperation: 19 countries

Annual budget: 100 million €

Staff: 600

Start User Mode 1994

Energy	6.04	GeV
Multibunch current	200	mA
Horizontal emittance	4	nm
Vertical emittance	4	pm

Availability: 98.83 %


Mean Time Between Failures: 77.7 hours

Average over the last 4 years

- More than 6000 annual user visits
- 1800 publications every year



The Upgrade Programme

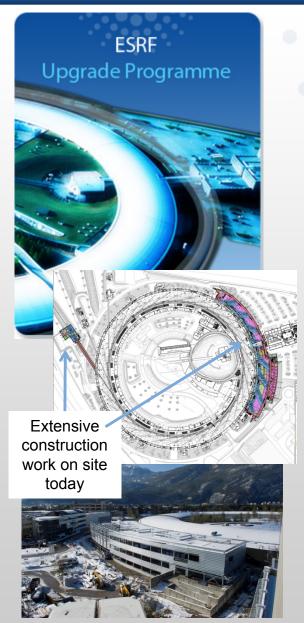

- @ Phase I (from 2009 to 2015)
- ➤ Eight new beamlines
- Extension of the experimental hall
- Refurbishment of many existing beamlines
- > Developments in synchrotron radiation instrumentation
- ➤ Upgrade of the X ray source for availability, stability, capacity and brilliance



- @ Phase II (from 2015 to 2019)
- > Four new beamlines
- > Developments in instrumentation and support facilities
- ➤ Increase the brillance and the coherence of the source
 - → implementation of a low emittance lattice
 - → horizontal emittance reduced from 4nm to 150pm


Project endorsed by the ESRF council in November 2012 Technical Design Study due for October 2014

Accelerator Upgrade Phase I


See: Poster MOPEA009

- Upgrade of BPM electronics Done
 - Improvement of the beam position stability Done
 - Coupling reduction ✓ Done (4pm)
- 6 m long straight sections ✓ Done (Four operational)
- Cryogenic in-vacuum undulators ✓ Done (Two CPMUs)
- 7 m straight sections ✓ Done (One in winter 2012)
- New RF SSA Transmitters ✓ Done for the booster
- New RF Cavities ✓ Three prototypes under test
- Top-up operation ✓ Project ongoing


Studies for the reduction of the horizontal emittance
 TDS in progress





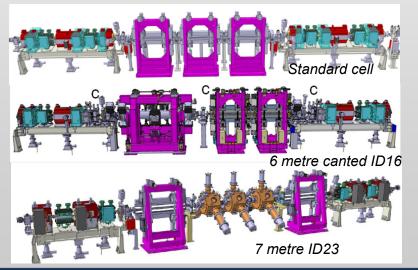

Accelerator Upgrade Phase II

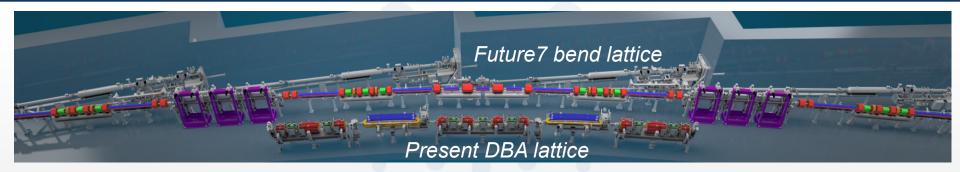

A recurrent request from ESRF beamlines is a <u>reduction of the horizontal emittance</u>with the strong constraint of re-using the same tunnel and infrastructure

Thanks to the worldwide efforts made to develop an Ultimate Storage Ring, the ESRF is re-addressing the question, with the following requirements:

- Reduce the horizontal equilibrium emittance from 4 nm to less than 200 pm
- Maintain the existing ID straights and beamlines
- Maintain the existing bending magnet beamlines
- Preserve the time structure operation and a multibunch current of 200 mA
- Keep the present injector complex
- Reuse, as much as possible, existing hardware
- Minimize the energy lost in synchrotron radiation
- Minimize operation costs, mainly wall-plug power
- Limit the downtime for installation and commissioning to about one year.



Storage ring performance (current and future sources)


horizontal emittance

• ESRF	2BA	4000 pm – 6 GeV, operational
• PETRA III	2BA	1000 pm – 6 GeV, operational
• NSLS II	2BA	~350 pm - 3 GeV, construction
• MAX IV	7BA	~300 pm - 3 GeV, construction
Sirius	5BA	~250 pm − 3 GeV, in planning
• Spring-8	6BA	∼70 pm – 6 GeV, in planning
• ESRF	7BA	~150 pm – 6 GeV, in planning

Almost linear increase of brightness down to 50-100pm emittance. For lower emittance the gain becomes less than linear due to:


- the diffraction limit
- mismatch of the electron beam with the X-ray beam

See: Poster MOPEA008

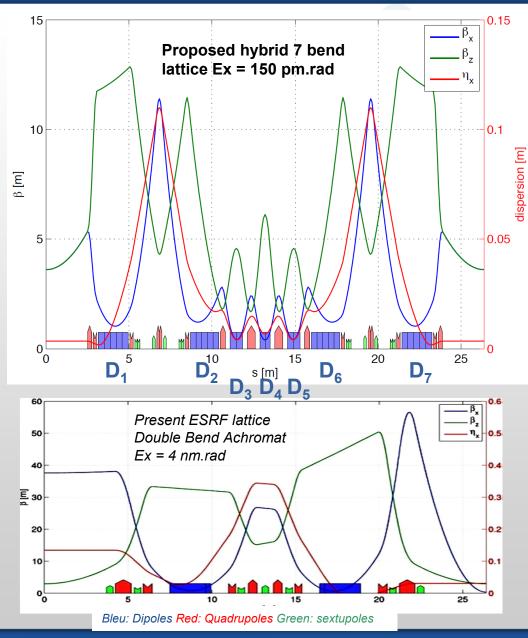

- @ 7 bending magnets D_{1to7}
- → reduce the horizontal emittance
- @ Space between D_1 - D_2 and D_6 - D_7 β -functions and dispersion allowed to grow
- chromaticity correction with efficient sextupoles
- @ Dipoles D₁, D₂, D₆, D₇
- → longitudinally varying field to further reduce emittance
- @ Central part alternating
- → combined dipole-quadrupolesD₃₋₄₋₅
- → high-gradient focusing quadrupoles
- @ D_4 (0.34T) and D_5 (0.85T)
- → Source points for BM beamlines

See: Poster MOPEA008

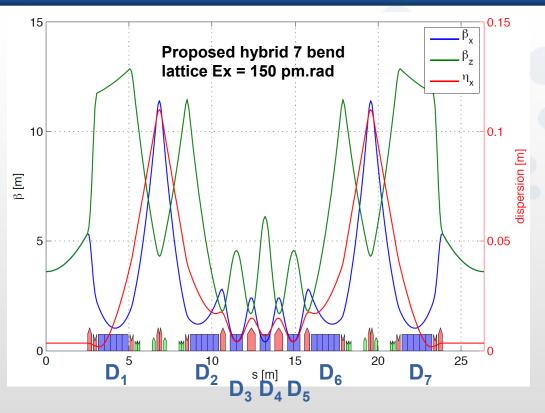


- @ 2 quadrupoles on each side of the straight section
- → provide in the middle:

$$\beta x = 3.6 \text{ m}$$

 $\beta z = 3.6 \text{ m}$


@ Special injection cell with $\beta x = 17 \text{ m}$

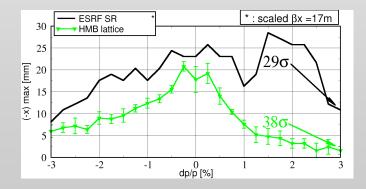

- ② Dynamic aperture close to the present one
- → Use the same injector complex



Brilliance at lower horizontal emittance

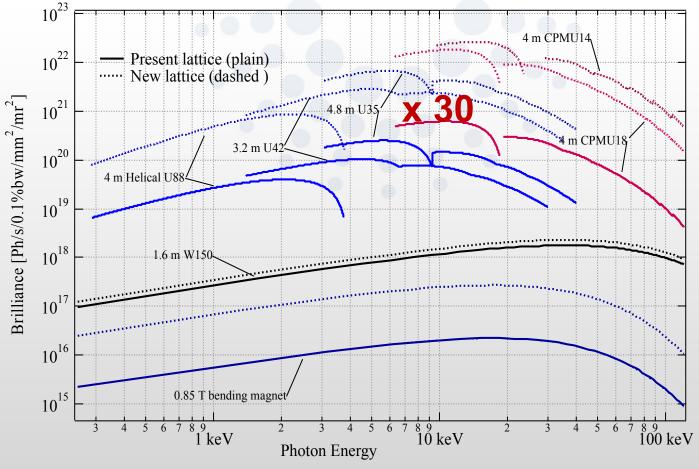


Hor. Emittance [nm]	4	0.15
Vert. Emittance [pm]	3	2
Energy spread [%]	0.1	0.09
β_x [m]/ β_z [m]	37/3	3.4/2.8

E = 6.04 GeVI = 200 mA




Coherence at lower horizontal emittance

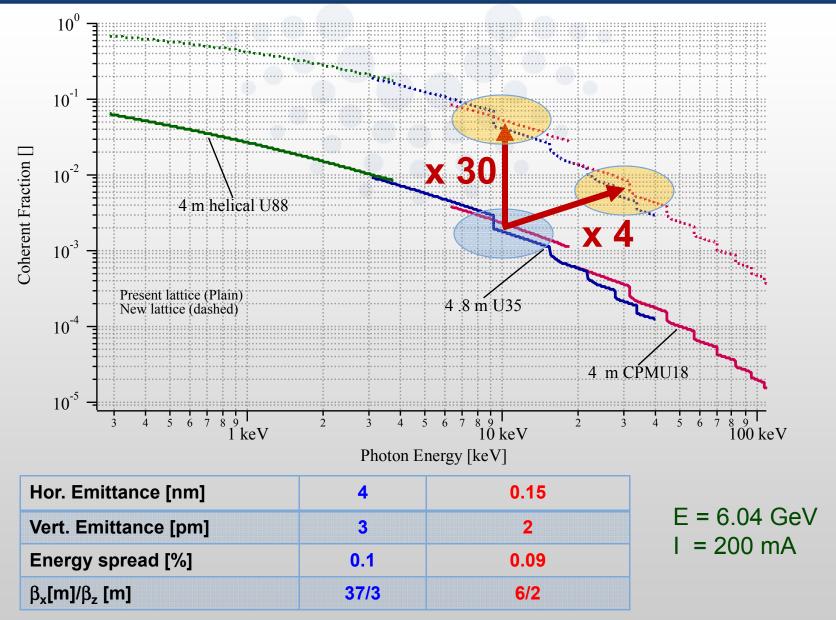



Technical challenge: magnet system

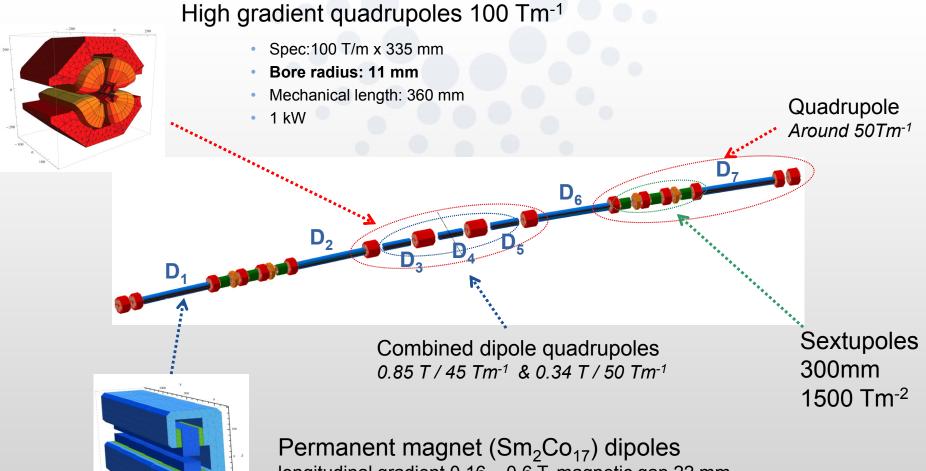

Permanent magnet (Sm₂Co₁₇) dipoles longitudinal gradient 0.16 – 0.6 T, magnetic gap 22 mm 2 metre long, 5 modules
With a small tuning coil 1%

@ Fiducialization and alignment are an issue



Technical challenges: compactness


- @ Mechanical design very challenging due to the compactness only 3.4 metre of drift tube per cell instead of today's 8m
- @ Vacuum: Low vacuum conductance due to reduced aperture of the chambers Main chambers made from extruded aluminium with NEG coating with localised pumping Lump absorbers to collect the radiation from dipole magnets
 - @ Energy efficient source: 30% less power consumption of the SR
 - → Increase efficiency of the production of magnetic field
 - → RF systems tailored to the reduced losses per turn from 5.4 to about 3.8 MeV/turn, including 0.5 MeV ID radiation

New lattice is more sensitive to longitudinal coupled-bunch instabilities (a factor two).


→ Use 12 HOM-damped single-cell cavities developed during phase 1.





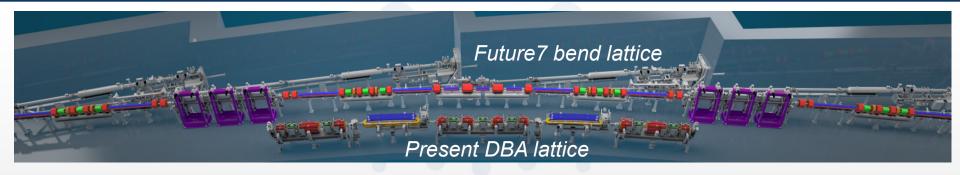

- © Extension of the experimental hall to provide2500 m2 of preparation and storage area
- @ Dismount and reconstruct the whole storage ring in about9 months in 3 sliding parallel working areas

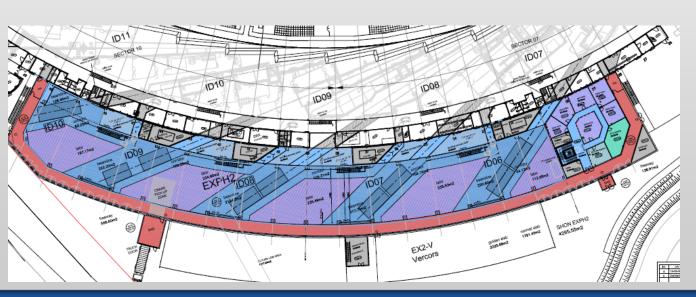

Use the hall later for long beamlines and support facilities



Road map

Schedule:

♦ Nov 2012 White paper ✓ Done

Nov 2012- Nov 2014 Technical Design Study ✓ TDS in progress

♦ Nov 2014 Council decision

Jan 2015 – Aug 2018 Detailed design and procurement

♦ End 2016 Preparation and storage building

Aug 2018– Aug 2019 Shutdown for installation and commissioning

♦ Autumn 2019 Back to operation



9 work packages defined for the TDS:

WP1: Beam dynamics

WP2: Magnets

WP3: Electron and photon beam transport

WP4: Power supplies WP5: Radiofrequency WP6: Implementation

WP7: Diagnostics and beam control

WP8: Photon source and user interface

WP9: Injector upgrade

Budget:


100 M€ Construction and commissioning of the new storage ring lattice

10 M€ Extension for the experimental hall extension

20 M€ Four state of the art beamlines

20 M€ Instrumentation and support facilities



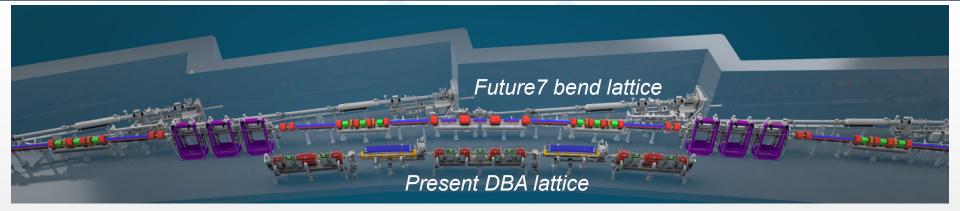

Thanks to the large expertise gained during ESRF UP phase 1 and the worldwide efforts to develop Diffraction Limited Storage Rings


ESRF Upgrade Phase II will be an excellent opportunity to:

Drastically increase the brightness of our Light Source before 2020

And also:

- Improve and expand the science reach of the SR-based light sources
- Enable new technologies
- Provide important know-how to continue the push for higher performances in SR-based Light Sources



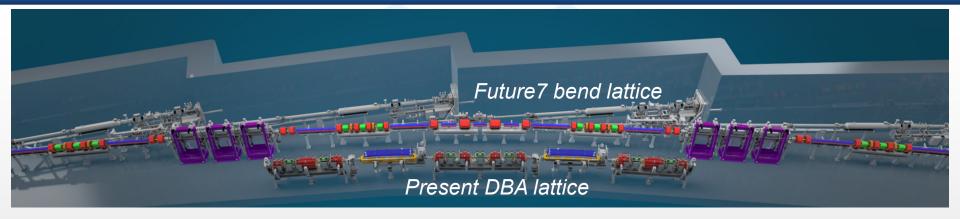





第四届國際拉子加速器會議